

Engine	Weichai WP4G95E221
Gross Power	70 kW (95 hp) @ 2,200 rpm
Net Power	68 kW (92.5 hp) @ 2,200 rpm
Maximum Speed	36 km/h
Standard Loader Bucket Capacity Standard	1 m ³
Backhoe Bucket Capacity	0.2 m ³
Operating Weight	8,100 kg

766A

BACKHOE LOADER



TOUGH WORLD. TOUGH EQUIPMENT.

766A SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Make	Weichai
Model	WP4G95E221
Gross Power	70 kW (95 hp) @ 2,200 rpm
Net Power	68 kW (92.5 hp) @ 2,200 rpm
Peak Torque	383 N • m @ 1,500 rpm
Displacement	4.5 L

ELECTRICAL SYSTEM

System Voltage	12 V
Battery Rating	95 amp - hr

DRIVE TRAIN

Number of Drive Wheels	2 wd / 4 wd
1st Maximum Speed, fwd/rev	5.9 km/h
2nd Maximum Speed, fwd/rev	10.7 km/h
3rd Maximum Speed, fwd/rev	20.5 km/h
4th Maximum Speed, fwd/rev	36 km/h
Turning Radius Outside of Front Tire	4,400 mm
Turning Radius Outside of Bucket	5,554 mm

BRAKES

Service Brake Type	wet disc
Service Brake Actuation	hydraulic service

TIRES

Front Tire Size	14 - 17.5NHS - 14RPTLL - 2B
Rear Tire Size	19.5 L -24 14PR TL R - 4

HYDRAULIC SYSTEM

Circuit Type	open
Total Flow	143 L/min
Main Relief Pressure	24 MPa
Pump Type	tandem gear pump
Steering Type	priority valve

OPERATING WEIGHTS

Operating Weight	8,100 kg
------------------	----------

LOADER PERFORMANCE

Standard Bucket Type (referenced)	general load bucket 1 m ³
Standard Bucket Heaped Capacity ISO (referenced)	1 m ³

Standard Bucket Width (referenced)	2,260 mm
Lift Capacity at Full Height	33.2 kN
Bucket Breakout Force	59.6 kN
Maximum Dump Angle at Full Height	45°
Dump Height at Maximum Angle	2,691 mm
Dump Reach at Full Height Discharge	713 mm
Boom Lift Capacity, end, at ground	47.3 kN
Maximum Dig Depth	89 mm

BACKHOE PERFORMANCE

Standard Bucket Type (referenced)	general bucket 0.2 m ³
Standard Bucket Heaped Capacity ISO (referenced)	0.2 m ³
Standard Bucket Width (referenced)	610 mm
Maximum Dig Depth	4,440 mm
Reach From Swing Pivot at Ground	5,443 mm
Turning Angle of Bucket	186°
Bucket Digging Force	58.2 kN
Dipper Digging Force, standard stick	37.5 kN
Loading Height	3,680 mm
Loading Reach from Swing Pivot	3,007 mm

SERVICE CAPACITIES



Fuel Tank	130 L
Engine Oil	13 L
Cooling System	15 L
Hydraulic Reservoir	130 L
Hydraulic System Total	170 L
Transmission and Torque Converter	16 L
Axle, front	6.9 L
Axle, rear	17.5

STANDARD EQUIPMENT

Weichai WP4G95E221 Engine
Carraro Transmission
Open Cab, ROPS / FOPS
Auxiliary Hydraulic Kit
Carraro 4 x 2 Axles
Boom Interlock
General load Bucket 1 m ³
Seat belt

OPTIONAL EQUIPMENT

Enclosed Cab, ROPS / FOPS, with AC
Rotary Beacon
Hydraulic shear
Vibratory Tamper
Hydraulic Hammer
Carraro 4 x 4 Axles
4 in 1 Load Bucket 1.0 m ³
Telescopic Boom

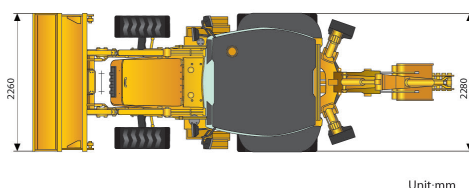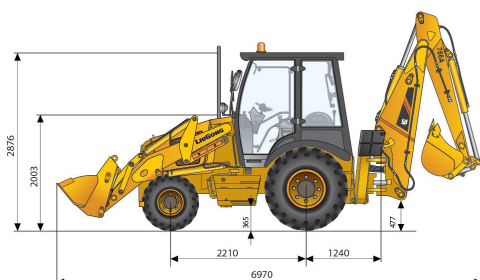

Unit:mm

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

05/2014 Designed by LiuGong